

Work Order ID 132161

Wednesday, April 29, 2015 2:21:09 PM

132161

Page 1

Item ID: D3118-5 Accept ***N900040100*** Setup Start ***NS1***
 Revision ID: Stop ***NS2***
 Item Name: Decal
 Start Date: 7/24/2015 Start Qty: 3.00 ***3*** Cust Item ID:
 Required Date: 7/24/2015 Req'd Qty: 3.00 ***3*** Customer:
 Reference:

Approvals: Process Plan: CY Date: APR 29 2015 Tooling: _____ Date: _____ Run Start ***NR1***
 QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Revision Nbr								
D3118	E								

100 PURCHASING 0.00
100
 Purchasing Memo 0.00
 Purchasing Issue P/O: 28313
 Manufacture as per dwg D3118
 Possible Supplier: SRB TECHNOLOGIES
 Supplier P#: 9004001
 Material release note required
 Sign should be self-luminous to min. brightness of 160 microlamberts

CY APR 30 2015 3

110 Receive & Inspect for Damage & Mat'l Certs 0.00
110
 Packaging Memo 0.00
 Packaging Ensure Material Release Note is attached

3x SP15-07-22

Picklist Print

Wednesday, April 29, 2015 2:21:08 PM

Page 1

Work Order ID: 132161

132161

Parent Item: D3118-5

D3118-5

Parent Item Name: Decal

Start Date: 7/24/2015

Required Date: 7/24/2015

Start Qty: 3.00

Required Qty: 3.00

Comments: IPP A: 05.05.25 New Issue KJ/JLM
12.05.11 AS PER DWG REV.D DD VERF:EC

IPP REV:B

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
---------------------------------	------------------------	---------------	-------------	---------------------	------------------	-----------------	--------------------	----------------	-------------	--------------	---------------	----------------	--------

9004001

Purchased

No

Each

0.0000

3


9004001

Sign Assembly


**

328015-07-22


SPECIFICATION CONTROL DRAWING

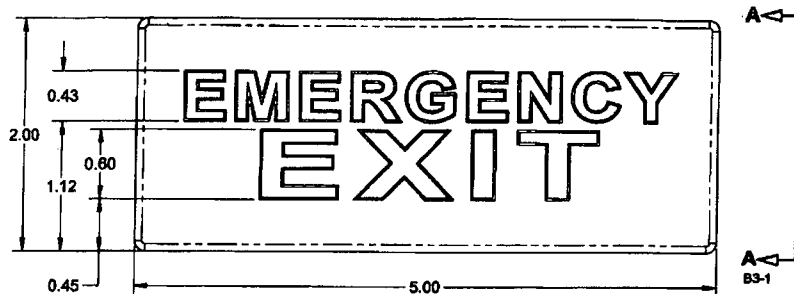


D3118-1 SIGN ASSEMBLY
REPLACES PREMIER P/N 027-57000-01,
BHT P/N 48860-01008-00

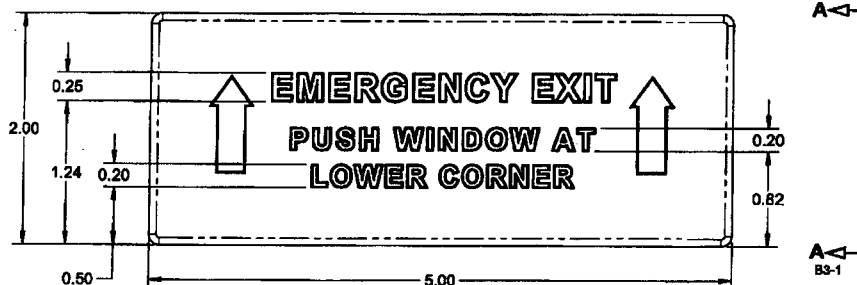

D3118-3 SIGN ASSEMBLY
REPLACES PREMIER P/N 027-57000-03,
BHT P/N 212-072-637-107

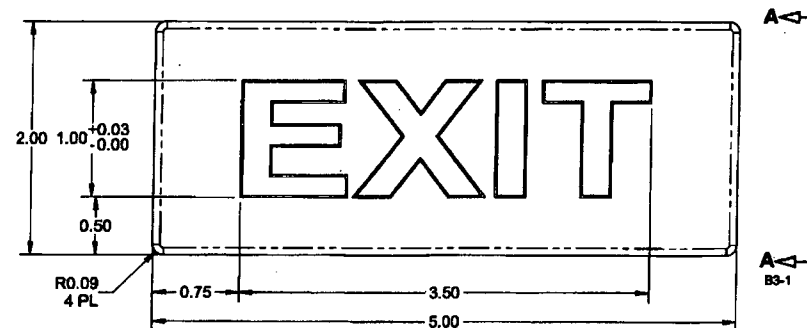

D3118-5 SIGN ASSEMBLY



VIEW A-A
C8-1
C1-1
B6-1

CL 15/6/29
W/O: 132/61

RELEASED
2013-08-01
MID

NOTES:

- 1) MATERIAL: POLYCARBONATE
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: WITH DART P/N "D3118-X" AND B/N "BX000X" PER DART QSI 044 8.1
- 7) WEIGHT: 0.30 lbs EACH
- 8) POSSIBLE SUPPLIER: SRB TECHNOLOGIES (CANADA), INC
320-140 BOUNDARY ROAD
PEMBROKE, ONTARIO, K8A 6W5
PHONE: 613-732-0055
FAX: 613-732-0056
- 9) SEE TABLE FOR SUPPLIER PROCUREMENT P/N'S
- 10) SIGNS SHOULD BE A RED BACKGROUND, CLEAR LETTERING WITH WHITE BORDER AROUND EACH LETTER
- 11) SIGNS SHOULD BE SELF-LUMINOUS TO MINIMUM BRIGHTNESS OF 160 MICROLAMBERTS

REV.	DESCRIPTION	BY	DATE
E	REVISE SUPPLIER AND SUPPLIER PART NUMBERS	SFM	13.07.16
D	UPDATED TO COMPLY WITH QSI 043; ADDED SUPPLIER P/N PROCUREMENT CHART (ZNA4-1) REF: PAR11-127	MB	11.11.02
C	ADD D3118-5	RF	05.02.22
B	ADD MINIMUM BRIGHTNESS = 160 MICROLAMBERTS	RF	04.05.05
A	NEW ISSUE	RF	02.04.15
DESIGN	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA DRAWING NO. D3118 TITLE SIGN ASSEMBLY SCALE NTS		
DRAWN			
CHECKED			
MFG. APPR.			
DE APPR.			
DATE	13.07.16	REV. E	SHEET 1 OF 1

DART PART NUMBER	SUPPLIER PART NUMBER	THICKNESS "T"
D3118-1	9004030	0.52
D3118-3	9004043	0.52
D3118-5	9004001	0.66

COPYRIGHT © 2013 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID **PO28313**

Purchase Order Date 4/30/2015

PO Print Date 4/30/2015

Page Number 1 of 2

Order From :

VC-ROY001

Ship To : DART AEROSPACE LTD

RBC ROYAL BANK - VISA
PAYMENT CENTRE, PO BOX 4016, STAT. A
TORONTO, ON M5W 1X6
CA

1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA

FILED

Contact Name

Vendor Phone

Ship To Contact

Ship To Phone

Ship Via:

FedEx Overnight collect

Ship Acct:

Buyer

Chantal Lavoie

Customer POID

Customer Tax #

10127-2607

Terms

COD

Currency

CAD

FOB

Destination-Collect

Line Nbr	Reference Vendor Part Number Line Comments Delivery Comments	Description/ Mfg ID	Req Date/ Taxable Promise Date	CD	Req Qty/ Unit of Measure	PO Unit Price	Extended Price
1	9004001 AS PER DWG D3118 REV. E B132161 SRB TECH P/N: 9004001	Sign Assembly	7/24/2015 Yes 7/24/2015		3.00 Each	\$386.12	\$1,158.36
Line Total:							\$1,158.36
2	71401-45	PROCUREMENT QUALITY CLAUSES	7/24/2015 No 7/24/2015		1.00	\$0.00	\$0.00
Quality Procurement Clauses A005 RIGHT OF ENTRY A016 PERSONNEL QUALIFICATION A026 CERTIFICATE OF MATERIAL CONFORMANCE A041 QUALITY MANAGEMENT SYSTEM A042 DART NOTIFICATION BY SUPPLIER A043 RETENTION OF QUALITY DOCUMENTS							

PO Instructions: SRB TECHNOLOGIES
VISA: 4516 0500 0527 9300
EXP: 10/16 CID:351

Note:

4/30/2015



Canadian Nuclear Safety Commission

Radiation Safety Data Sheet

This data sheet presents information on radioisotopes only.

For information on chemical compounds incorporating this radionuclide, see the relevant Material Safety Data Sheet.

Part 1 - RADIOACTIVE MATERIAL IDENTIFICATION

Chemical Symbol:	H	Common Names:	Tritium
Atomic Weight:	3	Atomic Number:	1

Part 2 - RADIATION CHARACTERISTICS

Physical Half-Life:	12.35 years
Unconditional Clearance Levels:	Activity Concentration (Bq/g) 1×10^2
CNSC Exemption Quantity:	Activity Concentration (Bq/g) 1×10^6 Activity (Bq) 1×10^9

Principal Emissions	Average Energy of Most Abundant Emission (MeV)	Maximum Energy of Most Abundant Emission (MeV)	Gamma-Ray Dose Rate at 1m Distance (mSv/h per GBq)	Shielding Information ¹
Neutrons	-	-	-	-
Gamma & X-ray	-	-	-	-
Beta* & Electron	0.0057	0.0186	-	Total absorption: <0.1 mm glass or <0.1 mm plastic
Alpha	-	-	-	-

* Where beta radiation is present, bremsstrahlung radiation will be produced. Shielding for bremsstrahlung radiation must be considered.

¹Delacroix, D. et al, Radionuclide and Radiation Protection Data Handbook 2002.

Progeny

Part 3 - DETECTION AND MEASUREMENT

Method of Detection:

Wipes counted by a beta probe (e.g., wipes counted by a liquid scintillation counter)

Dosimetry:

External: TLD (whole body & skin) _____ Extremity _____ Neutron _____
Internal: Whole body _____ Thyroid _____ Urine analysis ☒ Other (specify) _____

Part 4 - PREVENTATIVE MEASURES

Tritium is not a radiation hazard unless it enters the body. Once in the body, tritiated water is uniformly distributed in the body water and can then expose tissue. The dose from inhaled elemental tritium gas is 10,000 times less than that from tritiated water. Tritiated water can be absorbed through the surface of skin, leading to an internal exposure. Gaseous tritium is a fire and explosion hazard when exposed to heat or flame and can react vigorously with oxidizing materials.

Recommended protective clothing: Lab coat and PVC gloves (0.5 mm thick) are preferred because of this material's low permeability to tritiated water. Many tritium compounds readily penetrate gloves and skin. Handle these compounds remotely, wear two pairs of gloves and change the outer layer at least every twenty minutes. Plastic aprons provide added protection especially against tritiated water. Plastic suits may be necessary for work at TBq levels or in an atmosphere contaminated with tritiated water.

Handle tritiated water, gases and volatile liquids in ventilated enclosures. Use glass containers to store tritium compounds because tritiated water and tritiated organic solvents will pass through plastic. Use disposable absorbent liners on trays.

Consult CNSC license for requirements concerning engineering controls, protective equipment, and special storage requirements.

Part 5 - ANNUAL LIMIT ON INTAKE

	Ingestion	Inhalation	
Compound Type	Tritiated water	Tritiated water	Elemental tritium gas
Annual Limit on Intake (Bq)	1.0×10^9	1×10^9	1.0×10^{13}

EMERGENCY PROCEDURES

The following is a guide for first responders. The following actions, including remediation, should be carried out by qualified individuals. In cases where life threatening injury has resulted, **first** treat the injury, **second** deal with personal decontamination. In the case of an emergency, the Radiation Safety Officer should be contacted as soon as practicable.

Personal Decontamination Techniques

- Wash well with soap and water and monitor skin
- Do Not abrade skin, only blot dry
- Decontamination of clothing and surfaces are covered under operating and emergency procedures

Spill and Leak Control

- Alert everyone in the area
- Clear area
- Summon Aid

Emergency Protective Equipment, Minimum Requirements

- Gloves
- Footwear Covers
- Safety Glasses
- Outer layer or easily removed protective clothing
- Suitable respirator selected

Canadian Nuclear Safety Commission
P.O. Box 1046, Station B
Ottawa, Canada
K1P 5S9

Tel: (613) 995-5894 Fax: (613) 995-5086
24 Hour Emergency Hotline: (613) 995-0479

Revision number: 1

Date of revision: 19 September 2011

**SRB TECHNOLOGIES (CANADA) INC.**

320-140 Boundary Road
Pembroke, Ontario, Canada, K8A 6W5
Tel.: (613) 732-0055
Fax: (613) 732-0056
E-Mail: sales@betalight.com
Web: www.betalight.com

CERTIFICATE OF CONFORMANCE**ACCOUNT TO:**

Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON
Canada K6A 1K7

CERTIFICATE OF CONFORMANCE ID:

CDN003634

YOUR REFERENCE:
PO28313

OUR REFERENCE:
PO28313

DATE:
July 20, 2015

ITEM #	PART NUMBER	DESCRIPTION/ SPECIFICATION	QUANTITY	REMARKS/ DELIVERY POSITION
1	9004001 (D3118-5) SRBT P/N: 9004001	Sign Assembly T 8.12 Ci. (300.44 GBq) S/N's: 25781 - 25783	3 ✓	Batch # B28313 (PO28313) Mfg. July/2015

This is to certify that the whole of the material and/or parts described herein have been manufactured to the quality standards registered under ISO 9001:2008 and conform to the full specification of the appropriate drawings and purchase order requirements.

Test methods for Betalights™ and devices containing Betalights™, including leakage and surface contamination, conform to the British Defence Standard 62-4/4 and/or ANSI/HPS N43.4-2000.

Signed for on behalf of SRB Technologies (Canada) Inc.


N. Belleau, Quality Manager